

NEW! NETKEY™ Category 5e Jack Module



DATA SHEET

The Category 5e / Class D eight-position industry standard keystone lead frame jack module accepts 22-24 AWG solid, 100 ohm, 4 pair unshielded cable. The termination cap is colour coded for T568A and T568B wiring schemes. An optional termination tool ensures conductors are fully terminated.



technical information

Category 5e / Class D component performance: Meets all TIA/EIA-568-B.2 Category 5e and ISO 11801 2nd Edition Class D component standard requirements at swept frequencies up to 100 MHz

FCC compliance: Meets FCC Part 68 Subpart F; contacts plated with 50 microinches of gold

IEC compliance and keystone standard interface: Meets IEC 60603-7

key features and benefits

Termination cap: Provides strain relief, helps control cable bend radius and securely retains wires in place



Industry standard RJ45 interface: Familiar to end-users; backwards compatible

Modularity: Universal keystone jack modules snap in and out of the standard NETKEY™ keystone faceplates, modular keystone patch panels and keystone surface mount boxes.

applications

Applications include:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet)
- Token Ring 4/16
- Voice/data systems
- Voice over internet protocol (VoIP)

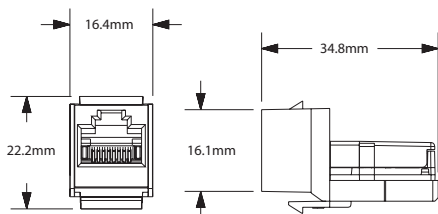

Netkey Category 5e Electrical Performance

Parameter	dB @ 100 MHz
NEXT	> 43.0
FEXT	> 35.1
Attenuation	< 0.40
Return Loss	> 20.0

NETKEY™ Network Components

NETKEY™ Jack Module

Standard Module: NK5E88M*

NETKEY™ Punchdown Panels

12 port, Vertical: NK5EPPG12W
24 port, 1 RU: NK5EPPG24
48 port, 2 RU: NK5EPPG48

NETKEY™ Modular Faceplate Panels

12 port vertical, 89D 89D Wall Mount Bracket: NKFP12W
 WB89D

24 port Flat, 1 RU: NKFP24
48 port Flat, 1 RU: NKFP48

NETKEY™ Flush Mount Modular Panels

24 port Flat, 1 RU: NKPP24FM
48 port Flat, 1 RU: NKPP48FM

NETKEY™ Patch Cords

PVC (off white)

Length 1m: NK5EPC1M**
Length 2m: NK5EPC2M**
Length 3m: NK5EPC3M**
Length 4m: NK5EPC4M**
Length 5m: NK5EPC5M**

Termination Tools

Jack termination tool: CJT
Panel punchdown tool: PDT110
Wire snipping tool: CWST
Wire stripping tool: CJAST

*To designate a colour, add suffix IW (Off White), EI (Electric Ivory), IG (Int'l Grey), WH (White), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow),

**For cable colours other than Off White, add suffix BU (Blue), GR (Green), RD (Red), or YL (Yellow), to the end of the part number.



WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6379.6700

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.666.2501

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020



For more information
Visit us at www.panduit.com/emea
Contact us by email: cs-emea@panduit.com
or by phone: +44 (0) 20 8601 7200

©2006 *PANDUIT* Corp.
ALL RIGHTS RESERVED.
01/2006