

specifications

Vertical cable management systems shall include components and systems that aid in routing, managing and organizing cable to and from equipment. Panels shall be a universal design mounting to EIA 19" or 23" racks, and constructed of steel bases with PVC duct attached. Duct fingers shall have score lines for easy removal. Duct finger spacing (when broken out) shall be equal to one rack space.



Vertical Cable Management System

technical information

Dimensions:	WMPV20	HxDxW=35x10.25x4.25in. (889x260.3x108mm)
	WMPV45	HxDxW=83x10.25x4.25in. (2018.2x260.3x108mm)
	WMPVHC45	HxDxW=83x12.09x6in. (2018.2x307.1x152.4mm)
	WMPVF20	HxDxW=35x5.08x4.25in. (889x129x108mm)
	WMPVF45	HxDxW=83x5.08x4.25in. (2018.2x129x108mm)
	WMPVHCF45	HxDxW=83x6x6in. (2018.2x152.4x152.4mm)
	WMPVFM45	HxDxW=83x5.08x4.25in (2018.2x129x108mm)
	WMPVFMHC45	HxDxW=83x6x6in. (2018.2x152.4x152.4mm)

Mounting options: Brackets and hardware (included) allow mounting to any EIA 19" or 23" rack. Panels sold as side mount for stand-alone racks, but can be center mounted between adjacent racks when used with WMPVCB bracket kit.

key features and ...benefits

Cable pass through holes	Provides ease of installation and cable maintenance
Available in standard and high capacity versions	Suitable for large and small cabling installations
Duct fingers can be removed for cable routing	Flexible to meet a variety of applications
Available with snap-on or hinged cover	Hinged cover design allows access to cable without having to remove the cover
Features wire retainer	Holds cable in place for quick moves, adds and changes
Rounded edges on duct fingers	Protects cable and installer's hands
Bend radius control	Protects cable and provides standards compliance

applications

PANDUIT'S Vertical Cable Management system provides a reliable solution to maintain an organized telecommunication closet. Cable management panels are designed for use with any EIA 19" or 23" rack and can be used for multimedia applications including UTP, ScTP, coax and fiber optic cables. These cable management panels provide a modular system that can be used with all PAN-NET™ Network Connectivity

products and OPTICOM™ Fiber Optic Enclosures for maximum flexibility when making system upgrades and changes. Multiple size and style options allow use with large or small cabling installations. To maximize your fiber routing, there is a 4x5 fitting available that allows the vertical panel with 4x5 duct to connect with PANDUIT's fiber routing system.

Front and Rear Duct with Snap-On Cover

20 RU:	WMPV20
45 RU:	WMPV45
45 RU (high capacity):	WMPVHC45

Front Only Duct with Snap-On Cover

20 RU:	WMPVF20
45 RU:	WMPVF45
45 RU (high capacity):	WMPVHCF45

Front and Rear Duct with Hinged Cover

20 RU:	WMPV20H
45 RU:	WMPV45H

Front Only Duct with Hinged Cover

20 RU:	WMPVF20H
45 RU:	WMPVF45H

Front Only Duct - Front Mount

45 RU:	WMPVFM45
45 RU:	WMPVFMHC45

Snap-On Replacement Covers

20 RU:	WMPV-RFC
45 RU:	WMPVRC
45 RU (high capacity):	WMPVHRC

Hinged Replacement Covers

20 RU:	WMPV20H-HRC
45 RU:	WMPV45H-HRC


Duct Fitting

4x5:	FRF4544BL
-------------	-----------

installer tip

To convert a panel to a center mount, order the WMPVCB bracket kit.

Vertical Cable Management System

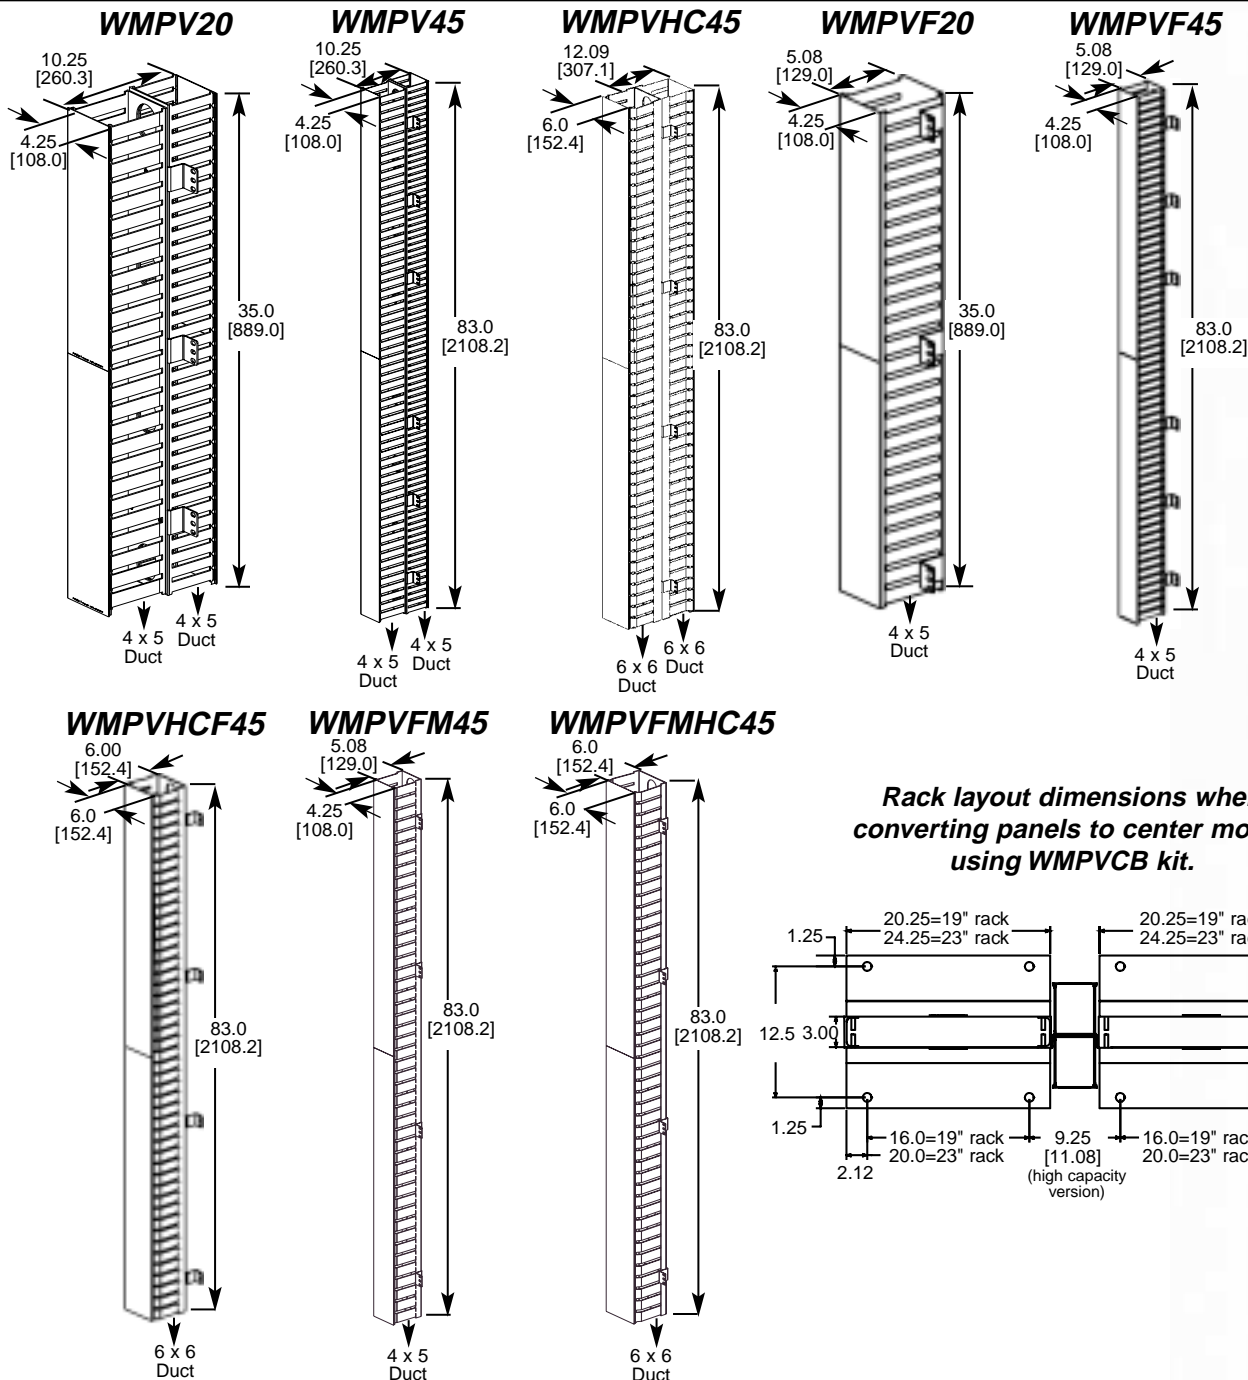

Dimensions are in inches (Dimensions in parentheses are metric)

Our products are warranted to be free from defects in material and workmanship at the time of sale but our obligation under this warranty is limited to the replacement of any product proved to be defective within 6 months (for product) or 90 days (for tools) from the date of delivery. Tool warranty is void if Panduit tools are modified, altered or misused in any way. Use of Panduit tooling with any product other than the specified Panduit products for which the tool was designed, constitutes misuse. Before using, user shall determine the suitability of the product for his intended use and user assumes all risk and liability whatsoever in connection therewith.



NETWORK CONNECTIVITY GROUP

WORLD HEADQUARTERS
 PANDUIT CORP.
 Tinley Park, Illinois, USA
 Phone: 800-777-3300
 708-532-1800, ext. 6914
 Fax: 708-460-2897
 Email: info@panduit.com
 Internet: www.panduit.com/ngc

This warranty is made in lieu of and excludes all other warranties, expressed or implied. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE ARE SPECIFICALLY EXCLUDED. Neither seller nor manufacturer shall be liable for any other injury, loss or damage whether direct or consequential, arising out of the use of, or the inability to use, the product. The information contained in this literature is based on our experience to date and is believed to be reliable. It is intended as a guide for use by persons having technical skill at their own discretion and risk. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. For specific dimensional requirements consult the factory. This publication is not taken as a license to operate under, or a recommendation to infringe any existing patents. This supersedes and voids all previous literature, etc.

**For Pricing and Further Information —
 Contact your local authorized
 PANDUIT PAN-NET™ Distributor or Sales Office**

PANDUIT CANADA
 Div. of PANDUIT CORP.
 Markham, Ontario
 Phone: 905-475-6922

EUROPEAN HEADQUARTERS
 PANDUIT EUROPE LTD.
 London, UK
 Phone: 44(0) 208-601-7200

ASIAN HEADQUARTERS
 PANDUIT SINGAPORE PTE. LTD.
 Republic of Singapore
 Phone: (65) 379 6700

PANDUIT CORP.
 Japan Branch
 Phone (81) (3) 3767-7011

PANDUIT MEXICO/LATIN AMERICA
 & CARIBBEAN
 Phone: (52) 3 666-2501

PANDUIT (AUST.) PTY. LTD.
 Phone: (61) 3-9794 9020