	TECHNICAL DATA SHEET	code	70101E
	Profibus cable 2 x AWG 22	version	2
		date	2016-03-09
		page	1/2


APPLICATION

Instrumentation and computer cable for Data Transmission applications such as Profibus.


Indoor use.

UL AWM 20276

CONSTRUCTION

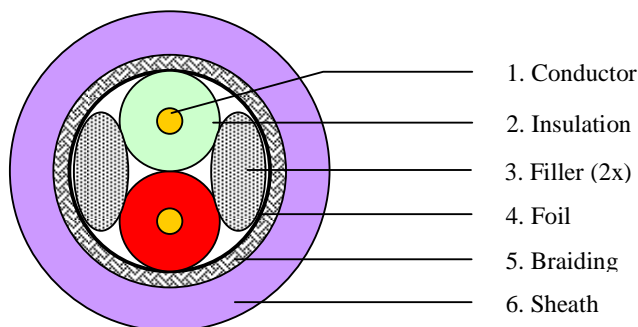

1. Conductor	AWG22 solid bare Cu
2. Insulation	
Material	Foamed Polyethylene
Diameter over insulation	2.45 ± 0.10 mm
Colour of insulation	Red and green
3. Filler (2x)	
Material	polypropylene
4. Foil	
Material	Aluminium / Polyester
5. Braiding	
Material	Tinned Cu
Coverage	65%
6. Sheath	
Material	PVC
Colour	Violet or Grey
Nominal diameter over sheath	7.80 mm

	TECHNICAL DATA SHEET	code	70101E
	Profibus cable 2 x AWG 22	version	2
		date	2016-03-09
		page	2/2

REQUIREMENTS AND TEST METHODS

Electrical:

Maximum operating voltage	30Vrms
Nominal resistance conductor	52 Ω /km
Nominal capacitance conductor to conductor @ 1kHz	30 pF/m
Impedance (3 – 20 MHz)	150 \pm 15 Ω
Maximum attenuation @ 0.2 MHz	0.9 dB/100m
Maximum attenuation @ 4 MHz	2.2 dB/100m
Maximum attenuation @ 16 MHz	4.5 dB/100m

*Nominal values are for information only.

Mechanical and physical:

Temperature range installing	-15 to +80 °C
Temperature range operating (moving installation)	-15 to +80 °C
Temperature range storage	-40 to +80 °C
Flame resistance	IEC 60332-1/ UL cable flametest
Minimum bending/setting radius	10 x / 5x cable diameter
UL AWM Style	20276



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.